


DISCHARGE HOSE

The discharge hose is used for the connection of the pressure regulator to the check valve. The W21.8 x 1/14" nut with the inserted gasket is installed on the pressure regulator. The G3/4" nut with the inserted gasket is connected to a check valve.



Model No.	B06920224-NF	B06920225-NF
Length	400 mm	400 mm
Connection	W21.8 x 1/14" • G3/4"	W21.8 x 1/14" • G3/4"
Bending Radius	130 mm	180 mm
Nominal Diameter	DN 12	DN 16
Max. Working Pressure	380 Bar	350 Bar
Burst Pressure	1400 Bar	1520 Bar
Material	<ul style="list-style-type: none"> • Connection - Galvanised steel • Hose inner layer - Oil resistant synthetic rubber • Hose insert - Two high tensile steel wire braided inserts • Hose outer layer - Oil resistant and weatherproof synthetic rubber 	

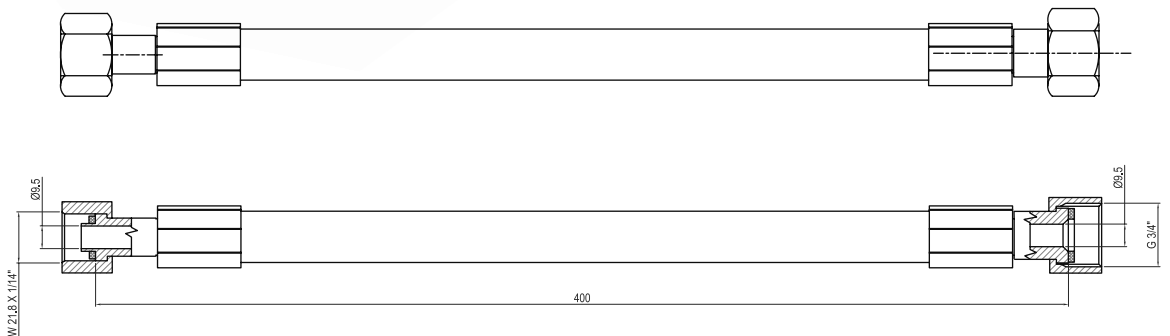

NAFFCO
 Email: info@naffco.com
www.naffco.com

In line with NAFFCO policy for continuous product development, NAFFCO has the right to change specifications without prior notice.