


# PILOT HOSE

The pilot hose is used to build up the pilot line, e.g. for the connection of several release devices and/or for the connection of the valve to the release device.

The pilot hose may only be used in accordance with component approval in stationary inert gases fire extinguishing systems. Several cylinders, equipped with valves, can be connected with pilot hoses.

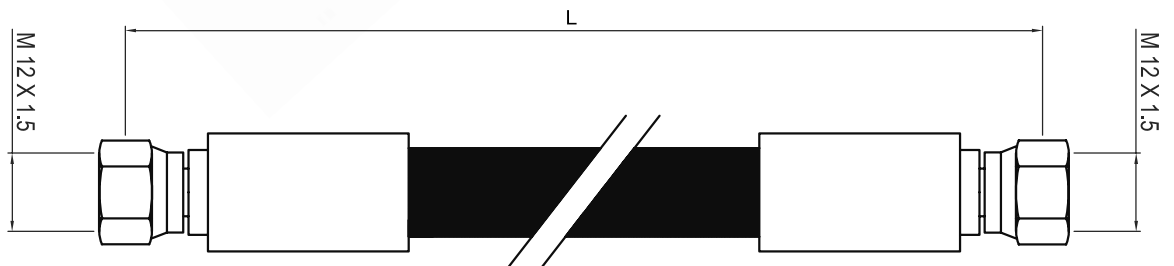

## SPECIFICATION

Model No.	B06920211-NF	B06920212-NF	B06920213-NF
Length	400 mm	700 mm	500 mm
Connection	2 x M12 x 1.5		
Bending Radius	75 mm		
Nominal Diameter	DN 6		
Working Pressure	400 Bar		
Burst Pressure	1600 Bar		
Material	<ul style="list-style-type: none"> <li>• Connection - Galvanised steel</li> <li>• Hose inner layer - Oil resistant synthetic rubber</li> <li>• Hose insert - Two high tensile steel wire braided inserts</li> <li>• Hose outer layer - Oil resistant and weatherproof synthetic rubber</li> </ul>		



**NAFFCO**  
 Email: [info@naffco.com](mailto:info@naffco.com)  
[www.naffco.com](http://www.naffco.com)

In line with NAFFCO policy for continuous product development, NAFFCO has the right to change specifications without prior notice.