



NAFFCO
PASSION TO PROTECT

NF-ARS 902




Description

NAFFCO aerosol generators can be used as a part of a highly effective fixed extinguishing system. NAFFCO generator is non-pressurized and is installed inside a room or compartment that requires protection. After activation, an aerosol cloud is generated, which expands volumetrically, flooding the space and extinguishing the fire. The NAFFCO generators are effective on class A, B, C and F fires. Mounting by means of 2 magnets with 90N pulling force which can stand up to 3G vibration, therefore they are suitable for use in heavy industrial circumstances.

Features

- Exceptional effective non-toxic fire extinguishing agent
- Uniquely easy to install and maintain
- Very cost efficient
- Available with electrical activator
- Product Certification: Kitemark - Under Process

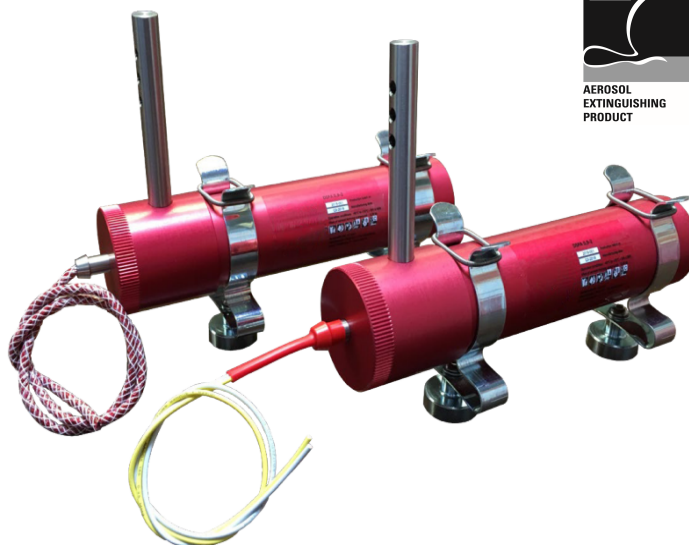

Application

The NAFFCO generators NF-ARS 902 is recommended for the protection of very small objects, such as small electrical equipment, airco's, ventilation, small electrical cabinets and computers. When calculating the volume, the dimensions of the present materials can be deducted.

Specification

Model	NF-ARS 902
Dimensions	Ø150 x 36 (x90) mm
Total weight	285 g
Compound weight	90 g
Volume coverage A(CW) + 30% safety	0,88 m ³
Discharge time	53-57 sec
Activation	Thermocord, electric activator
Operating conditions	-40°C to 75°C/ Up to 95% RH
Colour	Red
Min. distance for persons(75°C) from discharge outlet-150mm	
Min. distance for combustible material(200°C) from discharge outlet-Not applicable	
Min. distance for construction structures(400°C) from discharge outlet-Not applicable	

